

JUGGERNAUT

Modern Full Cutoff LED Wall Pack

Client: _____ Order #: _____
 Project Name: _____ Type: _____ Qty: _____

Performance Data

CRI
70+

CCT
3000K, 4000K, 5000K

Average Lifetime
50,000 Hours

Voltage
120-277V

Dimming
0-10V dimming standard,
100% down to 10%

Operating Temperature
-40° ~ 104°F (-40° ~ 40°C)

Listing
IP65 - Suitable for dry,
damp, wet locations.



10 Yr
Warranty
Available

Description

The Juggernaut full cutoff LED wall pack features a slim, yet striking aesthetic and is designed as the premier full cutoff wall-mount lighting solution. This modern luminaire is ideal for a variety of outdoor applications, including educational facilities, office space exteriors, municipal buildings, and as security lighting. The Juggernaut has been constructed to provide maximum energy cost savings over traditional light fixtures in mind, with an optional integrated motion sensor delivering even deeper savings.

Features

- Low-profile, sleek design provides a more modern aesthetic compared to traditional wall packs
- Full cutoff light output reduces light pollution, delivering illumination only where it is needed most
- Three housing sizes provide flexibility depending on the desired aesthetic
- Available in 3000K (warm white), 4000K (neutral white) or 5000K (cool white) color temperatures
- Optional FSP-211 motion sensor integrates directly into fixture housing
- Performs at up to 115 lumens per watt
- Type III short IES distribution

Ordering Options **Contact sales representative to order.**

FIXTURE SERIES

D464-L Modern Full Cutoff LED Wall Pack

WATTAGE/LUMENS

24 24W/2660²

42 42W/4250²

60 60W/6580^{2,3,8}

80 80W/9210^{2,3,8}

CCT

30 3000K⁷

40 4000K

50 5000K

VOLTAGE

U 120-277V

FINISH

Z Bronze¹

W White

OPTIONS

T Photocell

7R NEMA 7-Pin Receptacle & Photocell^{5,6}

E Emergency Backup⁵

M Motion Sensor w/Dimming (FSP-211)^{4,5,6}

WARRANTY

- 5 Year Warranty

10 10 Year Warranty

10L 10 Year Warranty including labor

¹ Standard for fixture

² Delivered Lumens (4000K) - For 5000K multiply by 1.02

³ 7 pin Twist Lock only offered in 60W & 80W

⁴ 20ft mounting height lens standard. Contact factory for higher mounting.



⁵ Not available for 24W

⁶ M option not available in conjunction with 7R

⁷ Contact factory for lead times

⁸ Housing comes with threaded knockouts


Dimensions

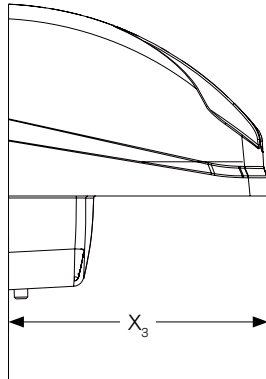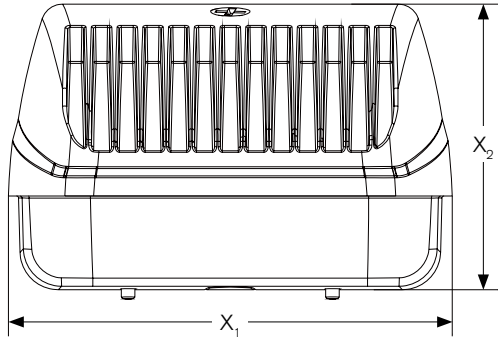


	Inches		
	24W	42W	60-80W
X₁	8.25	10.12	12.60
X₂	5.25	5.50	7.50
X₃	4.75	6.30	10.00

Photometrics

Model 80W 4000K

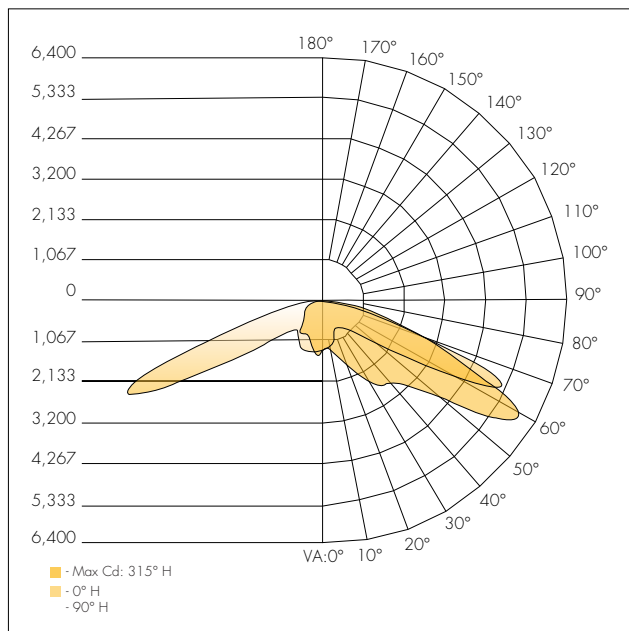


Isofootcandle

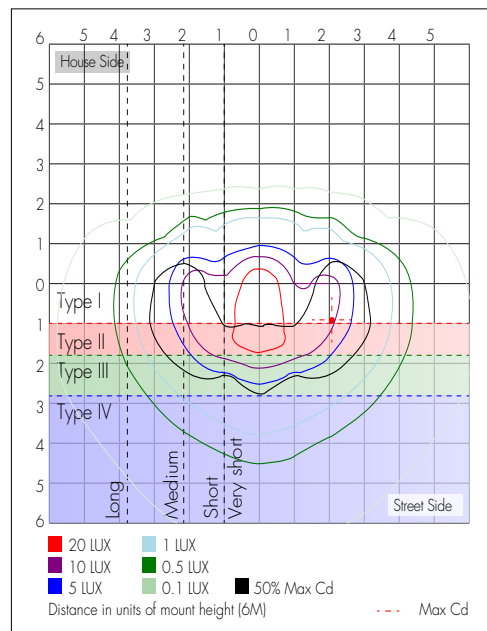

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	1,001.3	10.9%
0-40	1,763.2	19.1%
0-60	4,697.5	51%
60-90	4,497.2	48.8%
70-100	1,599.0	17.4%
90-120	11.5	0.1%
0-90	9,194.7	99.8%
90-180	17.9	0.2%
0-180	9,212.6	100%

Other Views



Top View



Front View




Side View

Emergency Battery Operation

The emergency battery backup (EM option) is integral to the luminaire - no external housing required! This design provides reliable emergency operation while maintaining the aesthetics of the product.

The emergency battery will power the luminaire for a minimum duration of 90 minutes (maximum duration of three hours) from the time supply power is lost, per International Building Code Section 1006 and NFPA 101 Life Safety Code Section 7.9, provided luminaires are mounted at an appropriate height and illuminate an open space with no major obstructions.

The examples below show illuminance of 1 fc average and 0.1 fc minimum of the single-engine Type IV product in emergency mode.

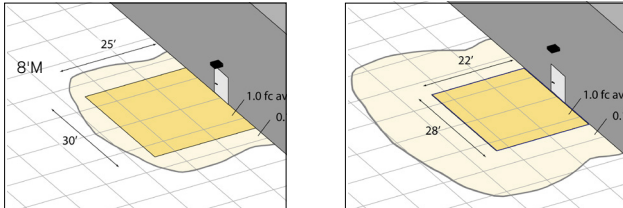

Step Dimming & Bi-Level

FSP-211

The FSP-211 mounts in an outdoor lighting fixture and provides multi-level control based on motion. The sensor also includes a photocell to measure the ambient light level. It controls 0-10 VDC LED drivers or dimming ballasts, as well as non-dimming ballasts and, with an SFP-LX Lens, is rated for wet and cold locations. All control parameters are adjustable via a wireless configuration tool capable of storing and transmitting sensor profiles.


Key Factors

- Fully adjustable high and low dimmed light levels.
- Designed for LED fixtures; rated for extreme temperatures and up to 200,000 on/off cycles
- Hold off setpoint with automatic calibration option for convenience and added energy savings
- Adjustable via handheld wireless configuration tool
- IP66 rated with choice of lenses for wet and outdoor locations, and mounting heights from 8' to 40'
- Adjustable time delay and cut off delay




Coverage & Dimensions


The FS-Lx lenses work with FSP-211 motion sensors to provide multi-level lighting control based on motion and the ambient light level. Four lens choices provide flexibility for varying mounting heights.

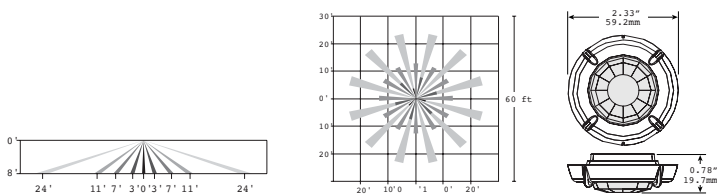


FSP-L2
360° lens, maximum coverage 48' diameter from 8' height

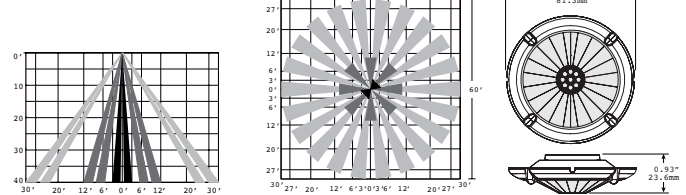

FSP-L4
360° lens, maximum coverage 60' diameter from 40' height

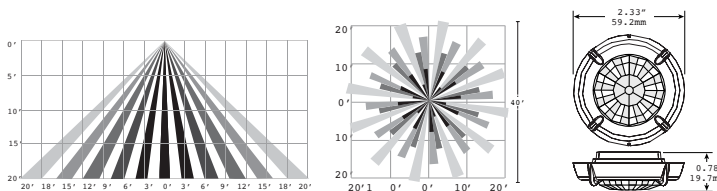

FSP-L3
360° lens, maximum coverage 40' diameter from 20' height

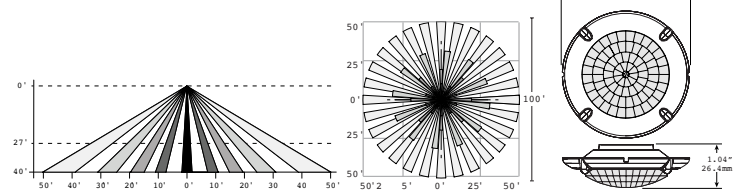

FSP-L7
360° lens, maximum coverage 100' diameter from 40' height