

# DHL-LP-LED™

## Low Profile LED Linear High Bay

Client: \_\_\_\_\_ Order #: \_\_\_\_\_  
Project Name: \_\_\_\_\_ Type: \_\_\_\_\_ Qty: \_\_\_\_\_

### Performance Data

CRI

80+

CCT

3500K, 4000K, 5000K

Projected Lifetime

>50,000 Hours

Dimming


0-10V Dimming Standard

Operating Temperature

-30°C to +52°C Ambient (-22°F to +125°F)

UL Listed

UL, Suitable for dry and damp locations

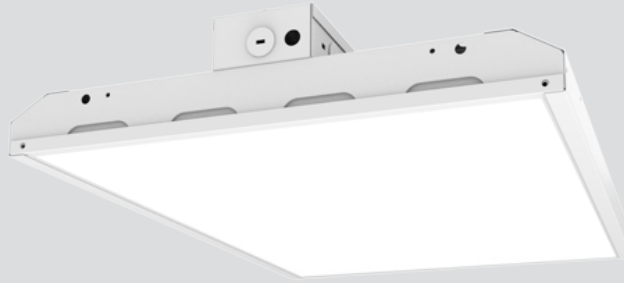

UL  
LISTED

10 Yr  
Warranty  
Available

### Description

The DHL-LP-LED™ is an innovative interior high bay lighting luminaire that delivers top-end performance packaged into a sleek form factor. This low-profile linear high bay/low bay luminaire offers commercial and industrial building owners an all-in-one solution for illuminating their facility while drastically reducing energy consumption to aid their bottom line. The DHL-LP-LED™ high bay luminaire features top-quality construction, a range of lumen packages, and various control options that make it a versatile solution for commercial and industrial building owners looking to upgrade to next-generation LED technology. Delivers up to 130lm/W.

### Features

Optical System

- Reflector systems features highly reflective coating, delivering adequate light for high ceiling applications.
- Diffuser lens reduces glare and improves occupant working conditions while maintaining high efficiencies.

Construction

- Rugged and durable construction withstands warehouse environments with an IP54 rating. Luminaire features durable, matte white finish.
- For more features see page 2

### Ordering Information

#### FIXTURE SERIES

DHL-LP-LED™ Low Profile LED Linear High/Low Bay

#### SIZE

4 4'

#### WATTAGE/LUMENS

#55579

220W 33000

260W 39000

300W 45000

#### CCT

354050 3500K-4000K-5000K

#### VOLTAGE

H 277-480V

#### LENS

F Frosted

#### OPTIONS

#55696 Emergency

#54871 PIR Sensor

#54872 Microwave Sensor

#54876 Quick Connect

#### WARRANTY<sup>1</sup>

- 5 Year Warranty

10 10 Year Warranty

10L 10 Year Warranty including labor

Qualification Model #: 555YY-yy-XX-xx (d)

<sup>1</sup>5 year standard unless specified

**Features (continues)**

Installation / Mounting

- Various mounting options available, including suspension, pendant, and surface mount. V-hook hangers and 41' chain accessories included.

Electrical

- Luminaire utilizes high-efficacy LED packages running at low operating temperatures for extended fixture lifetime.
- Comes equipped with luminaire quick-disconnect.

Controls / Dimming

- Continuous dimming (0-10V) comes standard.
- Suitable for use with dimmers, sensors, daylight harvesting and other control strategies to achieve deeper energy-savings and code compliance.

Certifications

- UL Listed, suitable for Dry and Damp locations (not Wet location)
- UL Class 2 Driver: SCP, OTP, OVP protection, FCC Part 15 Class B, UL8750 Class 2.

**Dimensions**

	Inches
	260W Version
<b>X<sub>1</sub></b>	12.69
<b>X<sub>2</sub></b>	3.69
<b>X<sub>3</sub></b>	45.87

REPLACEMENT DRIVER

55579

SDH160CS150X2V4

