

# DSW-LED

## Surface Wraparound

Client: \_\_\_\_\_ Order #: \_\_\_\_\_  
 Project Name: \_\_\_\_\_ Type: \_\_\_\_\_ Qty: \_\_\_\_\_

### Performance Data

CRI

80+

CCT

4000K

### Projected Lifetime

>173,000 Hours (L70);

>50,000 Hours (L90)

### Dimming

0-10V Dimming Standard

### Operating Temperature

-20° to +50°C Ambient


### UL Listed

UL, Suitable for dry and damp locations

### Warranty

5 year Standard

10 year Optional

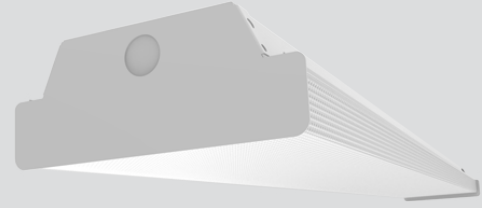

UL

Listed

10 Yr

Warranty

Available

### Description

The DSW series wraparound pairs economy styling with energy-efficient performance, delivering 130 lumens per watt. The luminaire's characteristic clean, low-profile design is both appealing and practically functional. This unit utilizes a clear, extruded acrylic refractor and a heavy gauge steel end plate with embossed light seal for dependable performance and good looks. The DSW wraparound is perfect for commercial spaces, school dormitories, offices and retail areas.

### Features

- Die formed heavy gauge steel with side flanges for extra uniformity and rigidity.
- Fixture ends are die-formed for rigidity.
- Post painted powder coated white finish.
- Diffuser is designed for one-piece .125" thick prismatic lenses.
- Snap on diffusers for easy servicing and hinge from either side.
- UL listed for damp locations.
- Dimming (0-10V) standard
- 80+ CRI for crisp, accurate color rendering

### A FIXTURE SERIES

DSW-LED Surface Wraparound

### B LENGTH

2 2'

4 4'

### C WATTAGE/LUMENS (LENGTH 2)

20 20W/3200<sup>1</sup>

### (LENGTH 4)

40 40W/5200<sup>1</sup>

### D CCT

40 4000K

### E VOLTAGE

U 120-277V

### F OPTIONS

E Emergency Battery

### G WARRANTY<sup>2</sup>


- 5 Year Warranty

10 10 Year Warranty

10L 10 Year Warranty including labor


<sup>1</sup> Delivered Lumens (4000K)

### Dimensions

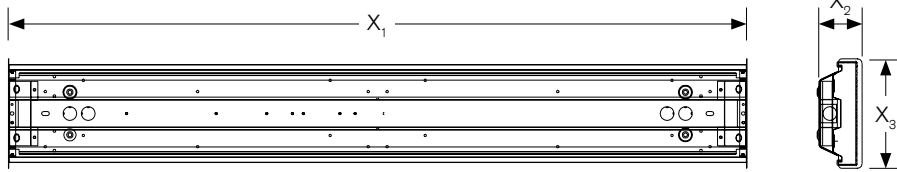

	Inches	REPLACEMENT DRIVER	
X <sub>1</sub>	48.72	DSW-LED22040U	SR25W500CUL-03
X <sub>2</sub>	2.54	DSW-LED44040U	SR45W1000CUL-01
X <sub>3</sub>	6.54		

### Photometric - Polar Graph

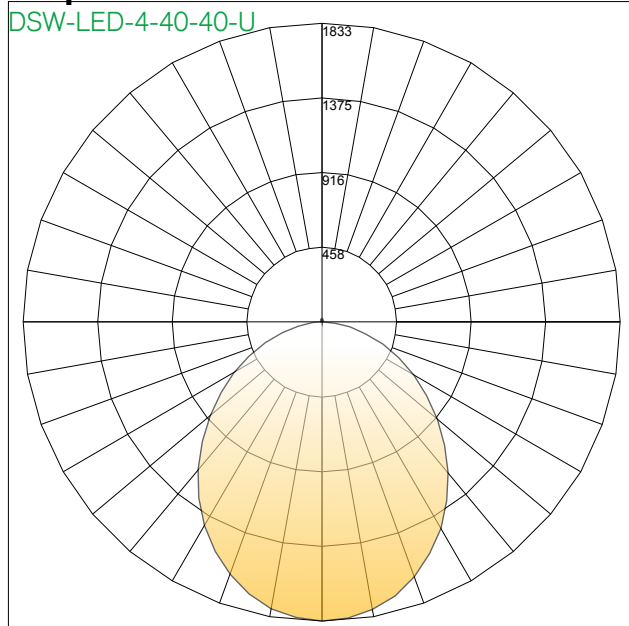

### Lumen Chart

Size	Wattage	4000K	
		Lumens	LPW
DSW-LED-2-20-354050-U	20	3500	130
DSW-LED-4-40-354050-U	40	5200	130