



LED INTERIOR LIGHTING


CEILING LIGHTS

Superior Life® LED Ceiling Lights are energy efficient, lightweight with a slim low profile design. They deliver bright, uniform light and are easy to install making them an ideal replacement for a wide variety of applications. The long life significantly reduces maintenance costs over the life of the fixture, quickly paying for itself.

Application: Designed for a variety of applications; offices, hospitals, retail stores, schools, lobbies, commercial buildings and work areas.

FEATURES

- Energy efficient
- Low glare and evenly distributed light
- Compact and elegant design
- Lightweight and easy installation
- Mercury Free - Environmentally friendly.
- For covered ceilings only

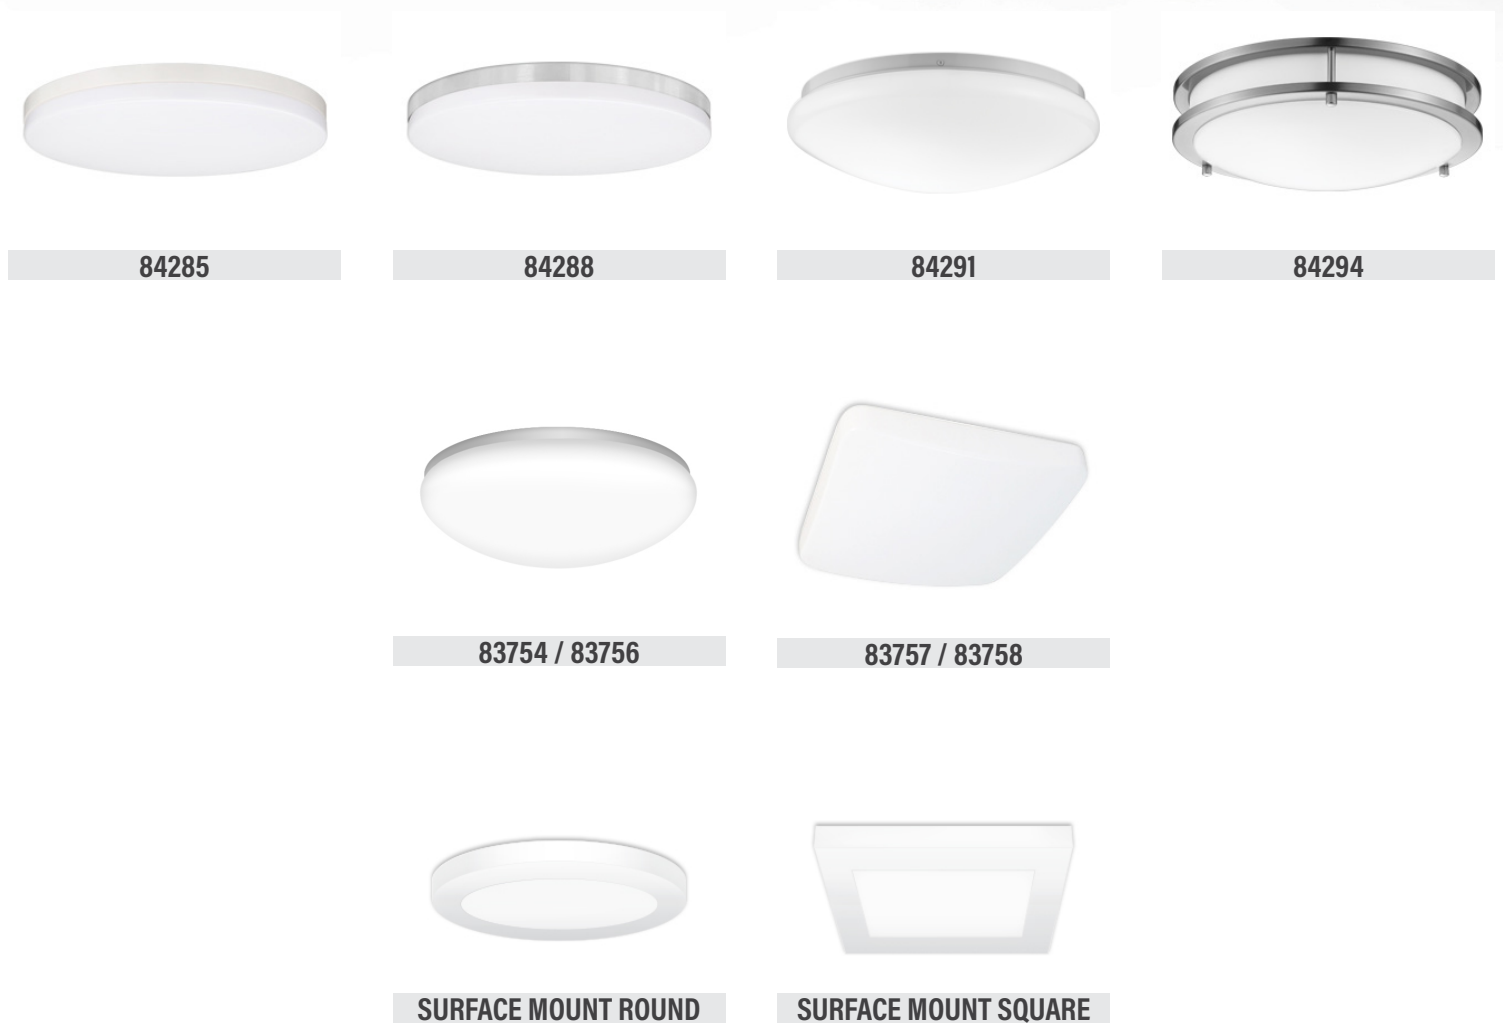

Note: Warranty and Qualifications can vary per item, see technical data sheets (TDS) for specific information. - Not all product variations listed on this page are Energy Star® qualified. Visit www.energystar.gov to confirm qualification - Published lumens on LED products are approximate and may vary slightly. - Specifications are subject to change without notice. - Photos and drawings may not be to scale and are for general reference only.



LED INTERIOR LIGHTING CEILING LIGHTS



STONE-SELECT™ PRESTIGE™ CEILING LIGHTS

| WATTS | ITEM# | DESCRIPTION | ENERGY STAR® | CCT | LUMENS | LPW | BEAM | CRI | MOL | VOLTS | BASE | LIFE HOURS | CASE |
|--|-------|---|--------------|--------|--------|-----|------|-----|------|-------|-------|------------|------|
| ROUND - 120V DIMMING (Selectable CCT 27K / 30K / 35K / 40K / 50K) | | | | | | | | | | | | | |
| 21 | 84285 | 13" PRESTIGE™ I CEILING LIGHT/21W/27-50K/DIMM/120V/WHT Qualification Model # TSPC-21-D5CT-SL-W-8 | P | 27-50K | 1470 | 70 | 220° | 80 | 2.3" | 120 | WIRED | 35,000 | 6 |
| | 84288 | 13" PRESTIGE™ II CEILING LIGHT/21W/27-50K/DIMM/120V/BNK Qualification Model # TSPC-21-D5CT-SL-N-8 | P | 27-50K | 1470 | 70 | 220° | 80 | 2.3" | 120 | WIRED | 35,000 | 6 |
| | 84291 | 13" PRESTIGE™ III CEILING LIGHT/21W/27-50K/DIMM/120V/WHT Qualification Model # TSPC-21-D5CT-MU-W-8 | P | 27-50K | 1470 | 70 | 220° | 80 | 3.7" | 120 | WIRED | 35,000 | 6 |
| | 84294 | 14" PRESTIGE™ IV CEILING LIGHT/21W/27-50K/DIMM/120V/BNK Qualification Model # TSPC-21-D5CT-SR-N-8 | P | 27-50K | 1470 | 70 | 220° | 80 | 3.7" | 120 | WIRED | 35,000 | 6 |

CEILING LIGHTS

| WATTS | ITEM# | DESCRIPTION | ENERGY STAR® | CCT | LUMENS | LPW | BEAM | CRI | MOL | VOLTS | BASE | LIFE HOURS | CASE |
|------------------------------|-------|---|--------------|-------|--------|-----|------|-----|------|-------|-------|------------|------|
| ROUND - 120V DIMMING | | | | | | | | | | | | | |
| 16 | 83754 | 11" MUSHROOM CEILING LIGHT/16W/40K/DIMM/WHT | ★ | 4000K | 1000 | 63 | 120° | 80 | 3.6" | 120 | WIRED | 35,000 | 10 |
| 25 | 83756 | 14" MUSHROOM CEILING LIGHT/25W/40K/DIMM/WHT | | 4000K | 1700 | 68 | 120° | 80 | 4.4" | 120 | WIRED | 35,000 | 5 |
| SQUARE - 120V DIMMING | | | | | | | | | | | | | |
| 17 | 83757 | 11" SQUARE CEILING LIGHT/17W/40K/DIMM/WHT | ★ | 4000K | 1300 | 76 | 120° | 80 | 3.3" | 120 | WIRED | 35,000 | 10 |
| 25 | 83758 | 13" SQUARE CEILING LIGHT/25W/40K/DIMM/WHT | ★ | 4000K | 1700 | 68 | 120° | 80 | 3.5" | 120 | WIRED | 35,000 | 5 |

SURFACE MOUNT FIXTURES

| WATTS | ITEM# | DESCRIPTION | ENERGY STAR® | CCT | LUMENS | LPW | BEAM | CRI | MOL | VOLTS | BASE | LIFE HOURS | CASE |
|---------------------------------------|-------|--|--------------|-------|--------|-----|------|-----|-----|-------|-------|------------|------|
| ROUND FIXTURES - 120V DIMMING | | | | | | | | | | | | | |
| 10 | 83880 | 5.5" DESIGNER SURFACE MOUNT/10W/30K/DIMM/WHT | ★ | 3000K | 600 | 60 | 112° | 93 | 1" | 120 | WIRED | 50,000 | 20 |
| | 83882 | 5.5" DESIGNER SURFACE MOUNT/10W/40K/DIMM/WHT | ★ | 4000K | 600 | 60 | 112° | 93 | 1" | 120 | WIRED | 50,000 | 20 |
| 15 | 83884 | 7" DESIGNER SURFACE MOUNT/15W/30K/DIMM/WHT | ★ | 3000K | 900 | 60 | 112° | 92 | 1" | 120 | WIRED | 50,000 | 20 |
| | 83886 | 7" DESIGNER SURFACE MOUNT/15W/40K/DIMM/WHT | ★ | 4000K | 900 | 60 | 112° | 92 | 1" | 120 | WIRED | 50,000 | 20 |
| 20 | 83888 | 9" DESIGNER SURFACE MOUNT/20W/30K/DIMM/WHT | ★ | 3000K | 1200 | 60 | 112° | 92 | 1" | 120 | WIRED | 50,000 | 10 |
| | 83890 | 9" DESIGNER SURFACE MOUNT/20W/40K/DIMM/WHT | ★ | 4000K | 1200 | 60 | 112° | 92 | 1" | 120 | WIRED | 50,000 | 10 |
| SQUARE FIXTURES - 120V DIMMING | | | | | | | | | | | | | |
| 10 | 83881 | 5.5" DESIGNER SURFACE MOUNT/10W/30K/DIMM/WHT | ★ | 3000K | 600 | 60 | 112° | 93 | 1" | 120 | WIRED | 50,000 | 20 |
| | 83883 | 5.5" DESIGNER SURFACE MOUNT/10W/40K/DIMM/WHT | ★ | 4000K | 600 | 60 | 112° | 93 | 1" | 120 | WIRED | 50,000 | 20 |
| 15 | 83885 | 7" DESIGNER SURFACE MOUNT/15W/30K/DIMM/WHT | ★ | 3000K | 900 | 60 | 112° | 93 | 1" | 120 | WIRED | 50,000 | 20 |
| | 83887 | 7" DESIGNER SURFACE MOUNT/15W/40K/DIMM/WHT | ★ | 4000K | 900 | 60 | 112° | 93 | 1" | 120 | WIRED | 50,000 | 20 |
| 20 | 83889 | 9" DESIGNER SURFACE MOUNT/20W/30K/DIMM/WHT | ★ | 3000K | 1200 | 60 | 112° | 92 | 1" | 120 | WIRED | 50,000 | 10 |
| | 83891 | 9" DESIGNER SURFACE MOUNT/20W/40K/DIMM/WHT | ★ | 4000K | 1200 | 60 | 112° | 92 | 1" | 120 | WIRED | 50,000 | 10 |

ACCESSORIES

Check fixture TDS to confirm compatibility of accessories.

| ITEM# | DESCRIPTION | CASE |
|-------|---|------|
| 83876 | DOWNLIGHT ACCESSORY FOR DESIGNER SURFACE MOUNTED FIXTURES | 5 |



83876

Key: P = Pending / LPW = Lumens Per Watt / TRAD. EQUIV. = Traditional Equivalent

Note: Warranty and Qualifications can vary per item, see technical data sheets (TDS) for specific information. • Not all product variations listed on this page are Energy Star® qualified. Visit www.energystar.gov to confirm qualification • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice. • Photos and drawings may not be to scale and are for general reference only.



PREMIUM QUALITY LIGHTING® • Phone: 800-323-8107
© P.Q.L., Inc. • 2285 Ward Avenue • Simi Valley, CA 93065

www.PQLighting.com
Rev: 08/25/2022