



Project _____ Date _____
 Catalog # _____ Quantity _____ Type _____



VINTAGE-LED
8WST19

FEATURES

- Classic filament-style LED design
- Warm, vintage light
- Energy efficient performance
- Low heat emission
- Ideal replacement for 60W traditional lamps

APPLICATION

Ideal for decorative and ambient lighting in homes, restaurants, cafés, hotels, and retail spaces. They are commonly used in pendants, wall sconces, and chandeliers to create a warm, nostalgic atmosphere with modern energy efficiency.

PRODUCT INFORMATION

ELECTRICAL	
Wattage	8W
Voltage	120V
Current	85mA
Power Factor	0.7
OPTICAL	
Lumens	800
Efficiency (LPW)	100
CCT	2700K
CRI	90
Beam Angle	300°
Dimming	See compatibility list, page 3
ENVIRONMENT	
Operating Temperature	-4°F ~ 113°F
Suitable Location	Damp
Suitable Fixture Type	Open
CONSTRUCTION	
Lens	Glass
Base / Power Supply	E26 - Medium
Finish	Clear
LIFESPAN <small>(Complete terms can be found on our website.)</small>	
Life Hours (Avg.)	15,000
Warranty	3-Year Standard
LISTINGS	



ORDERING CODE

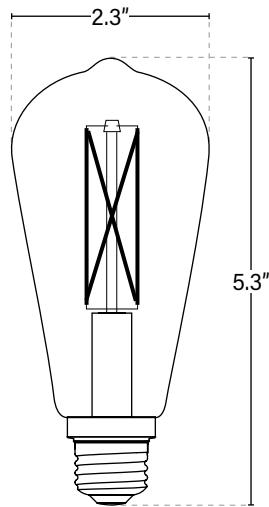
LVN8ST1927STMD1
PQL
 PREMIUM QUALITY LIGHTING®
ORDERING

LVN SERIES	8 OUTPUT	ST19 BULB	27 CCT	ST FILAMENT	MD BASE	1 GEN
LVN Vintage-LED	8 8W	ST19	27 2700K	ST Straight	MD Medium	

PACKAGING

MASTER CASE	
Quantity	100
Size (LxWxH)	27.4" x 13.1" x 13.1"
UPC	10811768026914
INNER CASE	
Quantity	10
Size (LxWxH)	12.9" x 5.2" x 6.3"
UPC Item	20811768026911
INDIVIDUAL BOX	
Size (LxWxH)	2.5" x 2.5" x 5.9"
UPC Item	811768026917

Tariff: -- • COO: China

DIMENSIONS

ORDERING CODE

LVN8ST1927STMD1


PREMIUM QUALITY LIGHTING®
DIMMER COMPATIBILITY

BRAND	MODEL	SINGLE LAMP				MULTIPLE LAMPS			
		Min. (mA)	Max. (mA)	Min. Output Current Percentage	Max. Output Current Percentage	Min. (mA)	Max. (mA)	Min. Output Current Percentage	Max. Output Current Percentage
COOPER	SAL06P-W-K-L	0	29.93	0.00%	98.91%	0	29.82	0.00%	98.55%
EATON	RF9640-ND	0	30.01	0.00%	99.17%	0	30.02	0.00%	99.21%
	TAL06-C2	0	29.95	0.00%	98.98%	0	29.93	0.00%	98.91%
	SUF7-W	0	30.1	0.00%	99.47%	0	29.9	0.00%	98.81%
LEVITON	DDMX1-BLZ	0	30.05	0.00%	99.31%	0	30.03	0.00%	99.24%
	TSM10	0	29.95	0.00%	98.98%	0	29.93	0.00%	98.91%
LEGRAND	ADTP703TU	1.05	30	3.47%	99.14%	0	30	0.00%	99.14%
	RHCL-450PTC	0	29.98	0.00%	99.07%	0	29.96	0.00%	99.01%
	RHCL-453P	0	30.08	0.00%	99.41%	0	29.94	0.00%	98.94%
LUTRON	DVCL-153PL	0	30	0.00%	99.14%	0	29.99	0.00%	99.11%
	MACL-153M	0	30.1	0.00%	99.47%	0	30.01	0.00%	99.17%
	MA-PRO	0	29.8	0.00%	98.48%	0	29.8	0.00%	98.48%
	NTRP-250	0	30.12	0.00%	99.54%	0	30.13	0.00%	99.57%
	PD-5NE	0	29.89	0.00%	98.78%	0	29.8	0.00%	98.48%
	PD-6WCL	0	30.09	0.00%	99.44%	0	30.08	0.00%	99.41%