



ORDERING CODE
SNB1MP40

FEATURES

- Microwave motion sensor with 360° coverage
- Bluetooth® SIG Mesh to 0-10V control
- Built-in 20mA 0-10V output
- LED motion indicator
- Low-voltage connector
- High-end trim, zoning, and continuous bi-level dimming
- Mesh networking extends control range and relays signals between devices
- All devices on the 0-10V line controlled via mobile app
- Local button reset (5-second press) or remote reset via control commands

APPLICATION


Sensor is designed for use with select PQL fixtures with 12-24VDC AUX installed sensor socket.

Project _____	Date _____
Catalog # _____	Quantity _____ Type _____


PRODUCT INFORMATION

ELECTRICAL	
Input Power	12-24VDC, >50mA
HF System	5.8GHz ± 75MHz
Transmission Power	<0.2mW
PERFORMANCE	
Control Output	0-10V, max. 25mA sinking current
Detection Angle	360°
Mounting Height	Up to 40ft max.
Bluetooth Range	Up to 200ft max., installation dependent.
ENVIRONMENT	
Operating Temperature	-40° ~ 158°F
IP Rating	IP65
CONSTRUCTION	
Housing	PC
Base / Power Supply	Screw-In
Finish	White
LIFESPAN <i>(Complete terms can be found on our website.)</i>	
Warranty	5-Year Standard
COVERAGE	

Side View

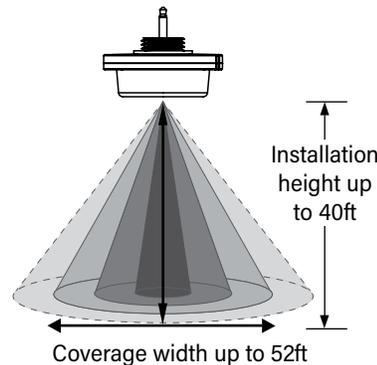

Top View

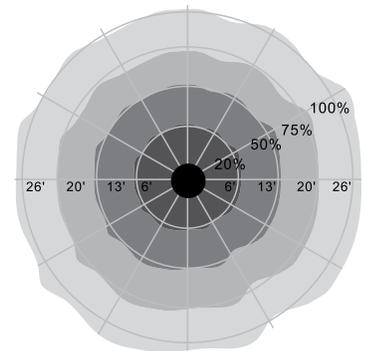

ORDERING CODE

SNB1MP40



ORDERING

SNB1	M	P	40
SERIES	SENSOR TYPE	CONNECTION TYPE	MOUNTING HEIGHT
SNB1 Bluetooth Sensor	M Motion	P Plug-in	40 40FT

PACKAGING

MASTER CASE	
Quantity	100
Dimensions (LxWxH)	10.6" x 10.6" x 8.6"
UPC	10854432004924
INDIVIDUAL ITEM	
Size (LxWxH)	2" x 2" x 2"
UPC	854432004927

Tariff: -- • COO: China

DIMENSIONS

