



ORDERING CODE  
**SNB1PW40**

**FEATURES**

- PIR sensor with 360° coverage
- Bluetooth® SIG Mesh to 0-10V control
- Built-in 20mA 0-10V output
- LED motion indicator
- Line-voltage connector
- High-end trim, zoning, and continuous bi-level dimming
- Mesh networking extends control range and relays signals between devices
- All devices on the 0-10V line controlled via mobile app
- Local button reset (5-second press) or remote reset via control commands

**APPLICATION**

Designed for use with indoor fixtures in warehouses, work stations, hallways and offices.

Project _____	Date _____
Catalog # _____	Quantity _____ Type _____

**PRODUCT INFORMATION**

ELECTRICAL		
Input Power	120/277V, 50/60Hz	
Maximum Load	Electronic Ballast (LED)	800W @ 120V 1200W @ 277V
PERFORMANCE		
Control Output	0-10V, max. 25mA sinking current	
Detection Angle	360°	
Detection Radius	30ft max.	
Mounting Height	Lens 1	25ft max.
	Lens 2	40ft max.
Bluetooth Range	Up to 164ft max., installation dependent.	
ENVIRONMENT		
Operating Temperature	-40° ~ 167°F	
IP Rating	IP20	
CONSTRUCTION		
Housing	PC	
Base / Power Supply	Wired	
Finish	White	
<b>LIFESPAN</b> <i>(Complete terms can be found on our website.)</i>		
Warranty	5-Year Standard	
LISTINGS		



ORDERING CODE

# SNB1PW40



## ORDERING


SNB1	P	W	40
SERIES	SENSOR TYPE	CONNECTION TYPE	MOUNTING HEIGHT
SNB1 Bluetooth Sensor	P PIR	W Wired	40 40FT

## PACKAGING


MASTER CASE	
Quantity	50
Dimensions (LxWxH)	19.7" x 10.8" x 10.8"
UPC	10811768020301
INDIVIDUAL ITEM	
Size (LxWxH)	3.7" x 2" x 4.9"
UPC	811768020304

Tariff: -- • COO: China

## WIRING

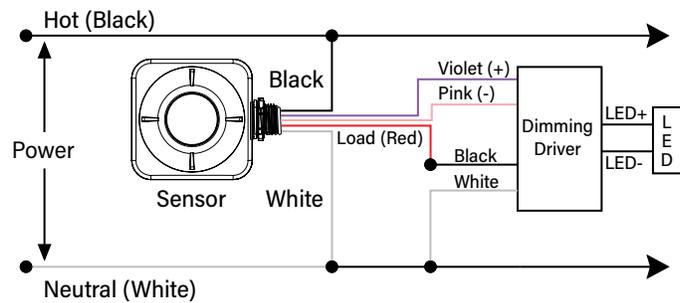

## DIMENSIONS

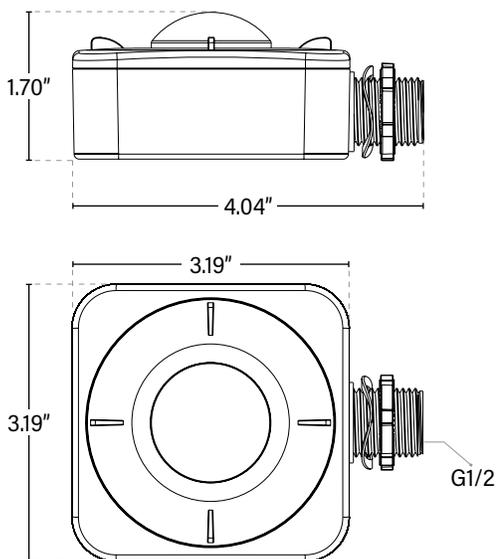

## COVERAGE

