

UCL1

LOW-PROFILE UNDER COUNTER

OVERVIEW

Lumens

Delivers up to 85 lumens per watt

Voltage

120V

CCT

3000K, 4000K, 5000K

Operating Temperature

-4°F to +104 °F

Suitable Location

Damp

Standard Finish

White

Project _____ Date _____


Catalog # _____ Quantity _____ Type _____



Low-profile under-cabinet lighting delivers seamless, shadow-free illumination with straightforward installation. A quick-link connection system lets multiple light bars join cleanly, eliminating visible gaps and dark spots. Offered in multiple lengths with versatile mounting options, it adapts easily to a range of applications, providing a continuous, polished lighting solution.

Features

- Seamless in-line connection provides continuous, glare-free illumination for a clean, professional finish.
- Quick-link system allows fast, tool-free installation between fixtures for effortless setup.
- Four length options combined with an adjustable 80°–280° connector support flexible layout design.
- Selectable color temperatures let you customize the ambiance to suit any space.
- Linkable design supports continuous runs.

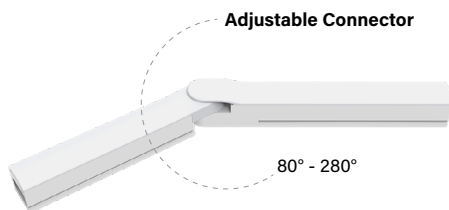

Pending ETL



BUILD WORKSHEET

Contact sales representative to order.

UCL1			3C	C	W
SERIES	LENGTH	OUTPUT	CCT	LENS	FINISH
UCL1 Under Counter Light	10 10" Adjustable Corner Connector	03 3W / 255LM	3C Selectable: 3000K, 4000K, 5000K	C Curved	W White
	12 12" Light	05 4.5W / 382LM			
	16 16" Light	06 6W / 510LM			
	24 24" Light	09 9W / 765LM			
	32 32" Light	12 12W / 1020LM			



5 Year Warranty is Standard unless specified.

ACCESSORIES (Ordered separately for field installation)


UCL1-47-PC	47IN LOW-PROFILE UNDER COUNTER LIGHT ON/OFF POWER CORD/WHITE
UCL1-24-JC	24IN LOW-PROFILE UNDER COUNTER LIGHT JUMPER CABLE/WHITE
UCL1-EC	LOW-PROFILE UNDER COUNTER LIGHT END-TO-END CONNECTOR/WHITE
UCL1-TAPE	DOUBLE SIDED TAPE FOR LOW-PROFILE UNDER COUNTER LIGHT/2 PIECES PER SET

DIMENSIONS

10" Adjustable Connector (80°-280°)

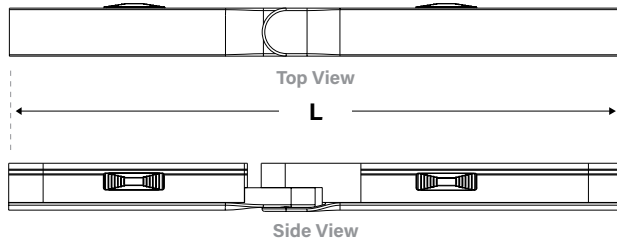

Under Counter Light

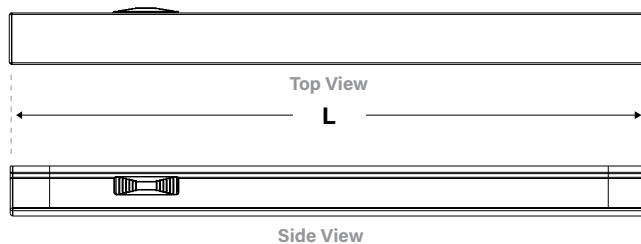

SIZE	10"	12"	16"	24"	32"
Length (L)	9.85"	12"	16"	24"	32"
Width (w)	0.75"				
Height (H)	0.73"				

Linkable design supports a maximum continuous run of up to 23FT with a total load capacity of 84W.



Quick-Ship Program
Select sizes, finishes and configurations in stock, and ready to ship.

PERFORMANCE DETAILS

LENGTH	10"	12"	16"	24"	32"
Electrical					
Wattage	3W	4.5W	6W	9W	12W
Voltage	120V				
Power Factor	0.9				
Optical					
Lumens	255	382	510	765	1020
Lumens Per Watt (LPW)	85				
CCT (Selectable)	3000K / 4000K / 5000K				
CRI	80				
Beam Angle	110°				
Dimming	See compatibility list below				
Environment					
Operating Temperature	-4°F to 104°F				
Suitable Location	Damp				
IP Rating	IP20				
Construction					
Lens	PC				
Finish	White				
Lifespan					
Warranty	5-Year Standard				
Listings					
Qualifications	Pending ETL				

DIMMER COMPATIBILITY

BRAND	MODEL
Leviton	1L14o5
	2F32o5
Lutron	DVCL-153P
	MACL-153P
	TGCL-153P

ACCESSORIES

Linkable design supports a maximum continuous run of up to 23FT with a total load capacity of 84W.

