



FEATURES

- Energy efficient: save up to 80% in energy costs
- High lumen output
- Instant-On
- For covered ceilings only

APPLICATION

Ideal for retrofitting inefficient fixtures in malls, hospitals, airports, offices, lobbies and other commercial applications.

ELECTRICAL

Wattage	15W
Voltage	120V
Current	120mA
Power Factor	0.9
Total Harmonic Distortion (THD)	<25

LIGHTING PERFORMANCE

Lumens	1000
Lumens Per Watt (Lm/W)	67
Color Temperature (CCT)	3000K
Color Rendering (CRI)	93
R9 (Red Value)	61
R13 (Skin Tones)	95
Beam Angle	95°
Light Distribution	Type VS
Dimmable Lighting Control	<i>Dimmable</i> see compatibility report

ENVIRONMENT

Operating Temperature	-4° ~ 113°F
Suitable Location	DAMP Indoor / Covered Ceilings
Ingress Protection Rating	IP43

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	Hongli 2835FVW
------------------	----------------

CONSTRUCTIONS

Housing	Aluminum / PC
Base / Power Supply	E26 - Medium
Finish	White

CERTIFICATIONS



Published lumens on LED products are approximate and may vary slightly. - Please check Energy Star website for the most current list of approved items - www.energystar.gov

PERFORMANCE DATA

PACKAGING


Item#: **90922**
LED 5"/6" RETROFIT CAN



DIMENSIONS (Inches)

Length	--
Width/Diameter	7.7"
Height	2.4"
Weight (Lbs)	--

Line drawings may not be to scale and are for general reference only.

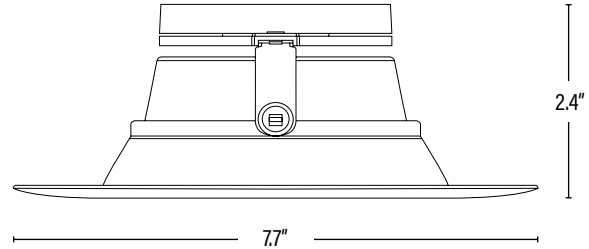

SUPPORTING DOCUMENTS (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW
IES Download from Web Item	VIEW
Dimmer Compatibility	VIEW
LM79	VIEW
LM80	VIEW

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	12	10854432004191	--	--
Individual Box	1	854432004194	--	--
Country of Origin	China			
HS Tariff	9405.40.8200			

ORDERING

ITEM#	DESCRIPTION	CASE
90922	LED RETROFIT 5"/6" CAN 15W/30K/90CRI/WHITE TRIM/MED/DIMMABLE - SUPERIOR LIFE® ENERGY STAR®	12

ACCESSORIES/REPLACEMENT PARTS

90905-QC	CONNECTOR FOR GU24 BASE ON 4" AND 5/6" LED RETROFIT CAN	1
----------	---	---

ADDITIONAL INFORMATION:

Family Item: 90928/5000K

PERFORMANCE DATA

PACKAGING