



Item#: **91704**  
**LINEAR T5**  
**FLUORESCENT LAMP**

**FEATURES**

Top lamp performance with Superior Life® fluorescent lamps. Built stronger to last longer these lamps outperform the competition, giving you the best overall value for a superior product.

**LOW MERCURY / ENVIRO-LUME™**

- Brass pins for better contact
- Strong lead in wires
- Triple wound tungsten cathode coded with rare earth oxides to lengthen life
- Passes EPA tests
- Krypton/Argon gas mixture reduces energy usage

**APPLICATION**


Larger warehouses, retail applications, commercial buildings and work areas.

**ELECTRICAL**

Wattage	21W
---------	-----

**LIGHTING PERFORMANCE**

Initial Lumens (Performance after 100 hours of operating life.)	2100
Mean Lumens (At 40% of the lamps rated average life.)	1953
Lumens Per Watt (LPW)	100
Color Temperature (CCT)	3500K
Color Rendering (CRI)	85

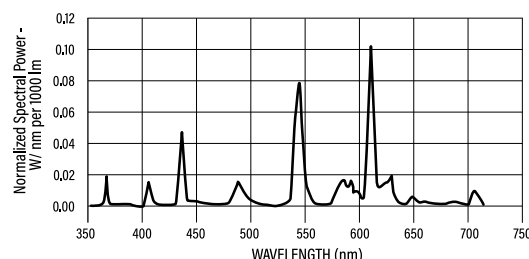

**LIFESPAN**

Average Life (Hours)	36,000
Warranty (Years)	<b>2</b>

**CONSTRUCTION**

Housing	Glass / Metal End Caps
Lens	White
Base / Power Supply	G5 - Mini Bi Pin
Mercury Content (Ⓜ)	2.5mg

**QUALIFICATIONS**

Low Mercury	Yes
Ⓔ EISA Compliant (Meets US Min. Efficiency standards)	Yes



*Published lumens are approximate and may vary slightly. • Specifications are subject to change without notice. • This lamp contains mercury. For proper lamp disposal contact your local municipal solid waste agency directly, call 888-537-4874 or visit lamprecycle.org for state-specific lamp recycling options.*


Item#: **91704**  
**LINEAR T5**



ITEM INFORMATION

**DIMENSIONS** (Inches)

Length (MOL)	34"
Width/Diameter (MOD)	0.6"
Net Weight (Lbs)	--



**SUPPORTING DOCUMENTS** (Grey = not available at this time.)

Product Sheet	VIEW
---------------	------

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	40	811768022681	35.4" x 4.3" x 6.3"	8.6
Individual Box	1	--	--	0.21
Country of Origin	China			
HS Tariff	8539.31.0070			

**ORDERING**

ITEM#	DESCRIPTION	CASE
91704	F21T5/835	40

**ADDITIONAL INFORMATION:**

Family Item(s): 91702/3000K • 91705/4100K • 91703/5000K