



# Item#: **93780**LED SPEC-SELECT™ SNAP & GO™ MAGNETIC MODULES

**LINEAR RETROFIT KITS FOR 2X2 LUMINAIRES** 

## **FEATURES**

- · Adjustable Wattage (3 settings)
- · Adjustable Color (3 settings)
- Quick connect
- · Magnetic mounting
- Innovative design

# **APPLICATION**

Ideal for retrofitting for traditional fluorescent fixtures and recessed troffers in drop-in ceilings.

#### **ELECTRICAL**

Wattage	15W / 20W /25W
Voltage	120-277V
Current	250mA
Power Factor	0.9
Total Harmonic Distortion (THD)	14.2

#### **LIGHTING PERFORMANCE**

Lumens	2250 / 3000 / 3750
Lumens Per Watt (LPW)	150
Color Temperature (CCT)	3500K / 4000K / 5000K
Color Rendering (CRI)	83
R9 (Red Value)	3
Beam Angle	118°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	B2 - U1 - G1
Dimmable Lighting Control	<b>("Dimmable</b> 0-10V, Range 10% - 100%

## **ENVIRONMENT**

Operating Temperature	-40° ~ 113°F
Suitable Location	DAMP
Ingress Protection Rating	IP20
Fixture Type	Enclosed

# LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

## **COMPONENTS**

LED Light Source	2835
Driver	937806

## **CONSTRUCTION**

Housing	Plastic
Base / Power Supply	Hard Wired

# **QUALIFICATIONS**








Visit www.designlights.org/search to confirm qualification. - Published lumens on LED products are approximate and may vary slightly. - Specifications are subject to change without notice.

# Item#: **93780 LED SPEC-SELECT™ SNAP & GO™ MAGNETIC MODULES**



DIMENSIONS (Inches)	MODULES	DRIVER
Length	21.8"	14"
Width	0.7"	1.2"
Height		0.8"
Net Weight (Lbs)	1.	1

<b>SUPPORTING DOCUMENTS</b> (Grey = not available at this time.)				
Product Sheet VIEW				
Install Instructions	VIEW			
IES Download from Web Item	VIEW			
LM79	VIEW			
LM80	VIEW			

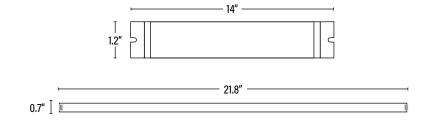

PACKAGING		UPC	<b>DIMENSIONS</b> (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	10	10811768029526		14
Individual Item	1	811768029529	N/A	N/A
Country of Origin	China			
HS Tariff	9405.11.6020			

# **ORDERING**

ITEM#	DESCRIPTION	CASE
93780	LED SPEC-SELECT™ SNAP & GO™ MAGNETIC MODULES/15-20-25W/35-40-50K/DIMM/120-277V • 2X2FT - <b>DLC</b> ®	10
ACCESSORI	ES	
93830	SINGLE FROSTED LENS FOR SPEC-SELECT™ SNAP & GO™ • 2FT	100
93748	MOUNTING CLIPS FOR MAGNETIC MODULES/2 PER SET	1
93650	SINGLE PACKAGE FOR 2X2FT SNAP & GO™	10
REPLACEME	ENT PARTS	
937806	REPLACEMENT DIMMABLE DRIVER	1