



ORDERING CODE
SNB1PC12

FEATURES

- PIR motion sensor with 360° coverage
- Daylight harvesting
- Bluetooth® SIG Mesh to 0-10V control
- Built-in 20mA 0-10V output
- LED motion indicator
- Low-voltage connector
- High-end trim, zoning, and continuous bi-level dimming
- Mesh networking extends control range and relays signals between devices
- All devices on the 0-10V line controlled via mobile app
- Local button reset (5-second press) or remote reset via control commands

APPLICATION


Sensor is designed for use with select PQL fixtures that are equipped with a compatible sensor socket.

Project _____	Date _____
Catalog # _____	Quantity _____ Type _____


PRODUCT INFORMATION

ELECTRICAL	
Input Power	10-14VDC
Input Current	>50mA
PERFORMANCE	
Control Output	0-10V, max. 25mA sinking current
Detection Angle	360°
Mounting Height	Up to 13ft max.
Bluetooth Range	Up to 100ft max., installation dependent.
ENVIRONMENT	
Operating Temperature	-4° ~ 140°F
IP Rating	IP20
CONSTRUCTION	
Housing	PC
Base / Power Supply	Plug-In (4-Pin)
Finish	White
LIFESPAN <i>(Complete terms can be found on our website.)</i>	
Warranty	5-Year Standard
COVERAGE	

Side View

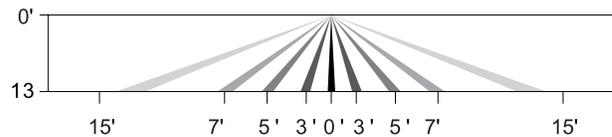

Top View

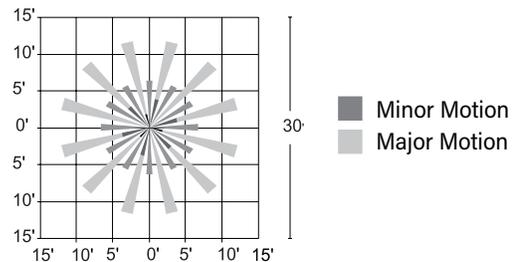

ORDERING CODE

SNB1PC12



ORDERING

SNB1	P	C	12
SERIES	SENSOR TYPE	CONNECTION TYPE	MOUNTING HEIGHT
SNB1 Bluetooth Sensor	P PIR	C Connector, 4-Pin	12 12FT

PACKAGING

MASTER CASE	
Quantity	100
Dimensions (LxWxH)	10.6" x 10.6" x 8.9"
UPC	10811768028758
INDIVIDUAL ITEM	
Size (LxWxH)	2" x 2" x 2"
UPC	811768028751

Tariff: -- • COO: China

DIMENSIONS

